
Power Modules

Power Modules
Horizontal Versions for Soldering (cont.)

Without decoupling diodes



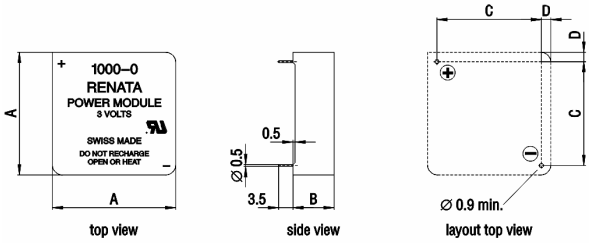

RENATA No.	Nominal capacity (mAh)	Nominal voltage (V)	Encapsulated cell	Weight (g)	Maximum dimensions (mm) A	B	C	D
175-0	225	3	CR2032MFR	6.5	22.0	8.0	17.8	2.1
1000-0	950	3	CR2477N	15.0	30.0	10.0	25.4	2.3

Operating temperature range: -30°C to +70°C (Module 175) ; -40°C to +85°(Module 1000)
Self-discharge rate: less than 1% per year at 25°
Specifications - module housings: polyamide 66
- soldering contacts: Isotan (55% Cu, 44% Ni-Mn)

Rev. 03/13

Renata SA
CH-4452 Itingen/Switzerland
Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95
sales@renata.com
www.renata.com