
TECNOPIU®
Safety is a way of life

MILLS GUARDS

PFR 80

SCHEDA PRODOTTO

Ultimo aggiornamento:
01/09/2026

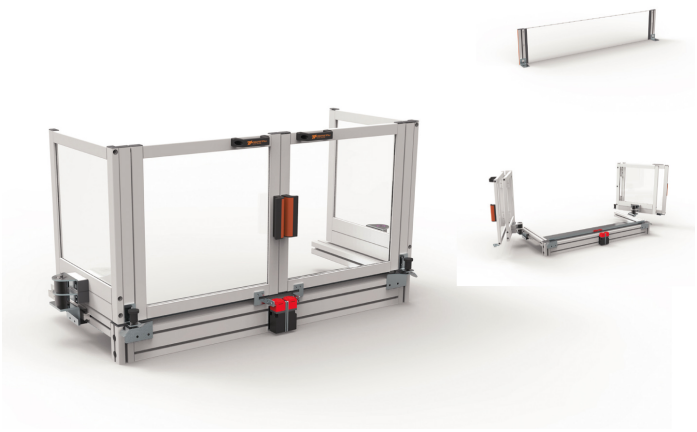

CARATTERISTICHE

Protects the operator from direct frontal contact with rotating spindle parts and from the projection of shavings and lubricant-coolant.
Attachable on the supporting frame (supplied) and on the base of the machine.
Equipped with a wide visibility shaped shield, with vertical lifting, supported by gas shock absorbers and adjustable, in extension, by means of the telescopic arms provided.
Complete with safety microswitch with n. 2 NC contacts.
1. Anchorage stirrups
2. Supporting frame
3. Main frame of the guard
4. Telescopic arm with guided parallel movement
5. Gas spring
6. Shield in plastic shockproof and oil resistant material
7. Handles to move te shield
8. Microswitch – n. 2 NC contacts
9. Guard locking system in closed position

Protects the operator from direct frontal contact with rotating spindle parts and from the projection of shavings and lubricant-coolant.

CODE	A	B	C	D	E	F
PFR 80/830	800	300	290	Max 950	600	1000
PFR 80/940	900	400	300	Max 950	600	1000
PFR 80/1045	1000	450	350	Max 1000	700	1000
PFR 80/S	...	...	...	...	...	...

Le nostre protezioni sono conformi alla direttiva macchine 2006/42/CE

CE

https://www.tecnopiu.it/

TECNOPIU

via Pio la Torre, 5 - 61010 Tavullia (PU) - Italy – VAT ID: 03657250407
Phone n°: +39 0721 476381 - Fax: +39 0721 476608 - Mail: info@tecnopiu.it