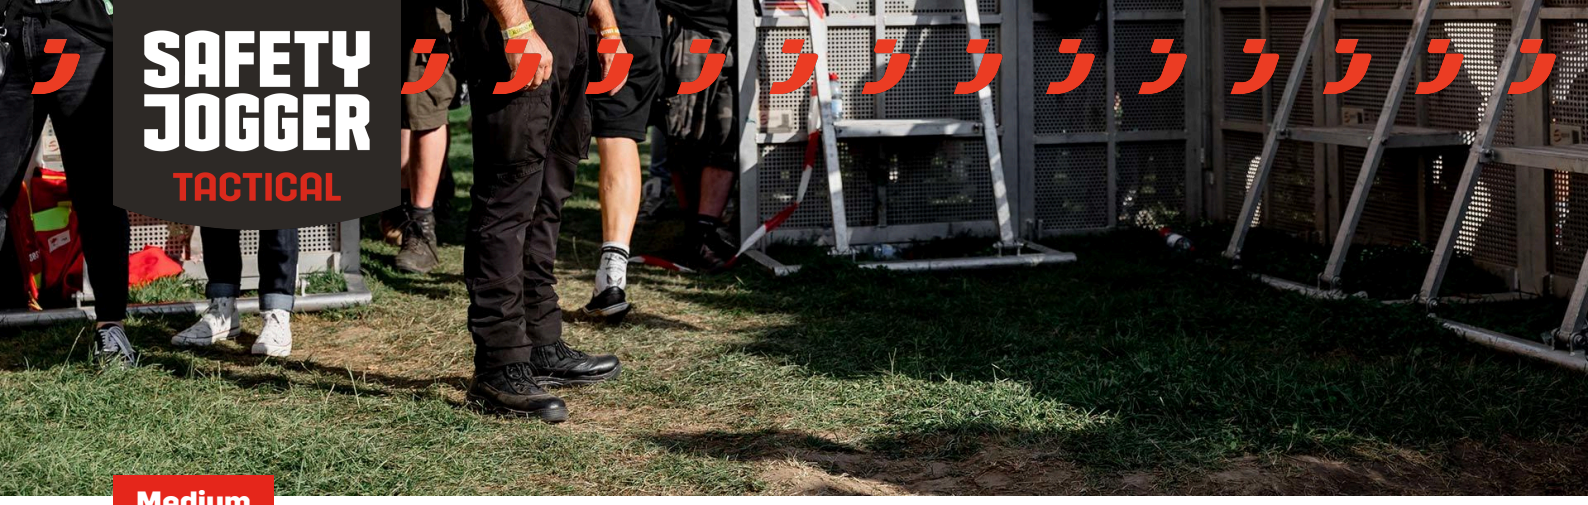


SAFETY JOGGER
TACTICAL

Medium

TACTIC OB

Mid-Cut Allround Tactical Boots

High-cut allround tactical leather boot made for tactical purposes. With it's 562 grams it's an extreme lightweight tactical boot.

Upper	Textile, Full Grain Leather
Lining	Recycled Mesh (100% recycled)
Footbed	SJ Recycled Foam Footbed (96% recycled)
Outsole	Rubber (NBR)
Category	OB / SR, LG, FO, HI, HRO, E, CI
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.690 kg
Norms	EN ISO 20347:2022+A1:2024 ASTM F3445:2024



BLK



SRA slip resistance
Slip resistance is one of the most important features of safety and occupational footwear. SRA slip resistant soles are tested on a ceramic tile with dilute soap solution.



Heat resistant outsole (HRO)
The outsole resists high temperatures up to 300°C.



Oil & fuel resistant
The outsole is resistant against oil and fuel.



Breathable leather upper
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.

Industries:
Tactical, Uniform

Environments:
Muddy environment, Uneven surfaces

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20347
Upper	**Textile, Full Grain Leather**			
	Upper: permeability to water vapor	mg/cm^2/h	4.5	≥ 0.8
	Upper: water vapor coefficient	mg/cm^2	35	≥ 15
Lining	**Recycled Mesh (100% recycled)**			
	Lining: permeability to water vapor	mg/cm^2/h	45	≥ 2
	Lining: water vapor coefficient	mg/cm^2	350	≥ 20
Footbed	**SJ Recycled Foam Footbed (96% recycled)**			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	**Rubber (NBR)**			
	Outsole abrasion resistance (volume loss)	mm^3	107	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.40	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.45	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.22	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.25	≥ 0.22
	Antistatic value	MegaOhm	N/A	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	36	≥ 20

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.