
TECNOPIU®
Safety is a way of life

MILLS GUARDS

PFR 20

SCHEDA PRODOTTO

Ultimo aggiornamento:
01/09/2026

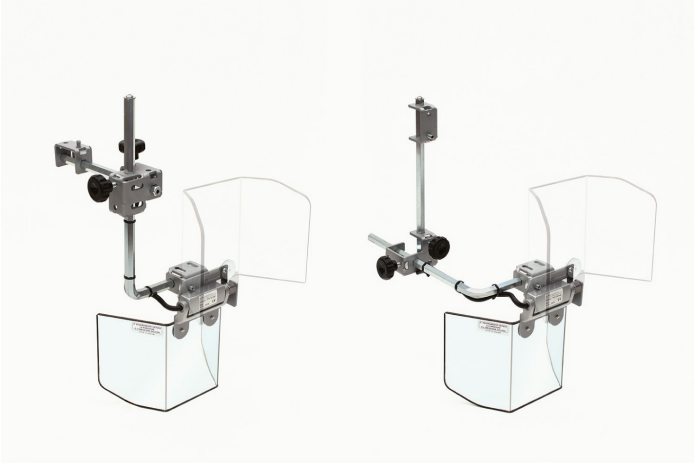

CARATTERISTICHE

Protects the operator from direct contact with rotating parts of the vertical spindle and from the projection of shavings and lubricant-coolant.
Shield equipped with innovative vertical “spring” opening system in the 60°-120°- 180° positions. Supported by widely-adjustable hexagonal arms, reversible between themselves to make available various fixing configurations.
The safety microswitch is integrated in the special hinge that supports the shield.

1. Anchorage stirrup – in pressed steel
2. Straight support arm – in hexagonal steel
3. Angular support arm – in hexagonal steel
4. “Cross” clamp for arm adjustment – in pressed steel
5. “Cross” clamp adjustment knobs
6. Shield support hinge with integrated microswitch – n. 2 NC contacts
7. Polycarbonate shield

Exclusive item supported by adjustable hexagonal arms.

Equipped with vertical opening shield, with microswitch integrated in the rotation hinge.

CODE	A	B	C	KG
PFR 20/218	250	180	110	3,1
PFR 20/320	300	200	125	3,2

Le nostre protezioni sono conformi alla direttiva macchine 2006/42/CE

CE

https://www.tecnopiu.it/

TECNOPIU

via Pio la Torre, 5 - 61010 Tavullia (PU) - Italy – VAT ID: 03657250407
Phone n°: +39 0721 476381 - Fax: +39 0721 476608 - Mail: info@tecnopiu.it